


Řemenice HTD 3M

standardní program

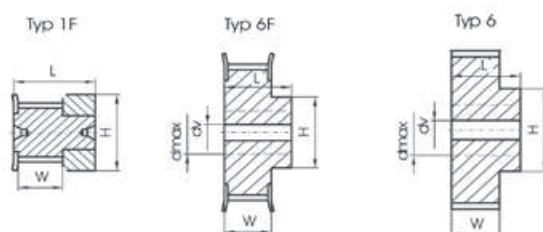

Počet zubů -označení	Hlavový průměr ozubení	Vnější průměr čel	Tvar	H	W	L	Předvrtání dv	Max. konečný otvor d	Hmotnost kg
----------------------	------------------------	-------------------	------	---	---	---	---------------	----------------------	-------------

HTD 3M-9 pro řemeny šířky 6 - 9 mm

Materiál: hliník

11-3M-09	8,79	13,0	1F	13,0	10,2	17,5		3,5	0,004
12-3M-09	10,70	15,0	1F	15,0	10,2	17,5		5,0	0,006
14-3M-09	12,61	16,0	1F	16,0	10,2	17,5		6,0	0,007
15-3M-09	13,56	17,5	1F	17,5	10,2	17,5		7,0	0,008
16-3M-09	14,52	18,0	6F	10,0	12,8	20,6	4	5,5	0,007
18-3M-09	16,43	19,5	6F	11,0	12,8	20,6	6	6,5	0,008
20-3M-09	18,34	23,0	6F	13,0	12,8	20,6	6	8,0	0,010
21-3M-09	19,29	25,0	6F	14,0	12,8	20,6	6	9,0	0,013
22-3M-09	20,25	25,0	6F	14,0	12,8	20,6	6	9,0	0,014
24-3M-09	22,16	25,0	6F	14,0	12,8	20,6	6	9,0	0,016
26-3M-09	24,07	28,0	6F	16,0	12,8	20,6	6	10,0	0,018
28-3M-09	25,98	32,0	6F	18,0	12,8	20,6	6	11,0	0,024
30-3M-09	27,89	32,0	6F	20,0	12,8	20,6	6	12,5	0,028
32-3M-09	29,80	36,0	6F	22,0	12,8	20,6	6	13,5	0,032
36-3M-09	33,62	38,0	6F	26,0	13,4	22,2	6	15,0	0,045
40-3M-09	37,44	42,0	6F	28,0	13,4	22,2	6	16,5	0,055
44-3M-09	41,26	48,0	6F	33,0	13,4	22,2	6	20,0	0,074
48-3M-09	45,08	-	6	33,0	13,4	22,2	8	20,0	0,074
60-3M-09	56,54	-	6	33,0	13,4	22,2	8	20,0	0,106
72-3M-09	67,99	-	6	33,0	13,4	22,2	8	20,0	0,145


HTD 3M-15 pro řemeny šířky 15 mm

Materiál: hliník

10-3M-15	8,79	13,0	1F	13,0	17,0	26		3,5	0,006
12-3M-15	10,70	15,0	1F	15,0	17,0	26		5,0	0,008
14-3M-15	12,61	16,0	1F	16,0	17,0	26		6,0	0,010
15-3M-15	13,56	17,5	1F	17,5	17,0	26		7,0	0,012
16-3M-15	14,52	18,0	6F	10,0	19,5	26	4	5,5	0,010
18-3M-15	16,43	19,5	6F	11,0	19,5	26	6	6,5	0,012
20-3M-15	18,34	23,0	6F	13,0	19,5	26	6	8,0	0,014
21-3M-15	19,29	25,0	6F	14,0	19,5	26	6	9,0	0,016
22-3M-15	20,25	25,0	6F	14,0	19,5	26	6	9,0	0,018
24-3M-15	22,16	25,0	6F	14,0	19,5	26	6	9,0	0,020
26-3M-15	24,07	28,0	6F	16,0	19,5	26	6	10,0	0,027
28-3M-15	25,98	32,0	6F	18,0	19,5	26	6	11,0	0,030
30-3M-15	27,89	32,0	6F	20,0	19,5	26	6	12,5	0,035
32-3M-15	29,80	36,0	6F	22,0	19,5	26	6	13,5	0,042
36-3M-15	33,62	38,0	6F	26,0	20,0	30	6	15,0	0,060
40-3M-15	37,44	42,0	6F	28,0	20,0	30	6	16,5	0,075
44-3M-15	41,26	48,0	6F	33,0	20,0	30	6	20,0	0,095
48-3M-15	45,08	-	6	33,0	20,0	30	8	20,0	0,103
60-3M-15	56,54	-	6	33,0	20,0	30	8	20,0	0,150
72-3M-15	67,99	-	6	33,0	20,0	30	8	20,0	0,212

Řemenice HTD 5M

standardní program

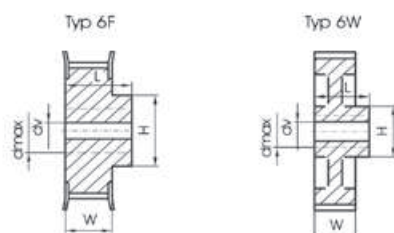

Počet zubů -označení	Hlavový průměr ozubení	Vnější průměr čel	Tvar	H	W	L	Předvrtání dv	Max. konečný otvor d	Hmotnost kg
-------------------------	------------------------------	-------------------------	------	---	---	---	------------------	----------------------------	----------------

HTD 5M-9 pro řemeny šířky 9 mm

Materiál: do P40-5M ocel, od P44-5M hliník

12-5M-09	17,96	23,0	6F	13,0	14,5	20,0	4	8,0	0,028
14-5M-09	21,14	25,0	6F	14,0	14,5	20,0	6	9,0	0,034
15-5M-09	22,73	28,0	6F	16,0	14,5	20,0	6	10,0	0,042
16-5M-09	24,32	28,0	6F	16,5	14,5	20,0	6	10,5	0,050
18-5M-09	27,51	32,0	6F	20,0	14,5	20,0	6	12,5	0,070
20-5M-09	30,69	36,0	6F	23,0	14,5	22,5	6	13,5	0,094
21-5M-09	32,28	38,0	6F	24,0	14,5	22,5	6	14,0	0,110
22-5M-09	33,87	38,0	6F	25,5	14,5	22,5	6	15,0	0,118
24-5M-09	37,06	42,0	6F	27,0	14,5	22,5	6	16,0	0,145
26-5M-09	40,24	44,0	6F	30,0	14,5	22,5	6	18,0	0,170
28-5M-09	43,42	48,0	6F	30,5	14,5	22,5	6	18,0	0,200
30-5M-09	46,60	51,0	6F	35,0	14,5	22,5	6	21,0	0,236
32-5M-09	49,79	54,0	6F	38,0	14,5	22,5	8	23,0	0,270
36-5M-09	56,16	60,0	6F	38,0	14,5	22,5	8	23,0	0,324
40-5M-09	62,52	71,0	6F	38,0	14,5	22,5	8	23,0	0,400
44-5M-09	68,89	-	6W	38,0	14,5	25,5	8	23,0	0,170
48-5M-09	75,25	-	6W	45,0	14,5	25,5	8	28,0	0,182
60-5M-09	94,35	-	6W	45,0	14,5	25,5	8	28,0	0,230
72-5M-09	113,45	-	6W	45,0	14,5	25,5	8	28,0	0,270


HTD 5M-15 pro řemeny šířky 15 mm

Materiál: do P40-5M ocel, od P44-5M hliník

12-5M-15	17,96	23,0	6F	13,0	20,5	26	4	8,0	0,034
14-5M-15	21,14	25,0	6F	14,0	20,5	26	6	9,0	0,046
15-5M-15	22,73	28,0	6F	16,0	20,5	26	6	10,0	0,056
16-5M-15	24,32	28,0	6F	16,5	20,5	26	6	10,5	0,064
18-5M-15	27,51	32,0	6F	20,0	20,5	26	6	12,5	0,086
20-5M-15	30,69	36,0	6F	23,0	20,5	26	6	13,5	0,112
21-5M-15	32,28	38,0	6F	24,0	20,5	26	6	14,0	0,130
22-5M-15	33,87	38,0	6F	25,5	20,5	26	6	15,0	0,140
24-5M-15	37,06	42,0	6F	27,0	20,5	28	6	16,0	0,180
26-5M-15	40,24	44,0	6F	30,0	20,5	28	6	18,0	0,220
28-5M-15	43,42	48,0	6F	30,5	20,5	28	6	18,0	0,250
30-5M-15	46,60	51,0	6F	35,0	20,5	28	6	21,0	0,300
32-5M-15	49,79	54,0	6F	38,0	20,5	28	8	23,0	0,350
36-5M-15	56,16	60,0	6F	38,0	20,5	28	8	23,0	0,426
40-5M-15	62,52	71,0	6F	38,0	20,5	28	8	23,0	0,520
44-5M-15	68,89	-	6W	38,0	20,5	30	8	23,0	0,225
48-5M-15	75,25	-	6W	38,0	20,5	30	8	23,0	0,187
60-5M-15	94,35	-	6W	50,0	20,5	30	8	30,0	0,305
72-5M-15	113,45	-	6W	50,0	20,5	30	8	30,0	0,375

Řemenice HTD 5M

standardní program

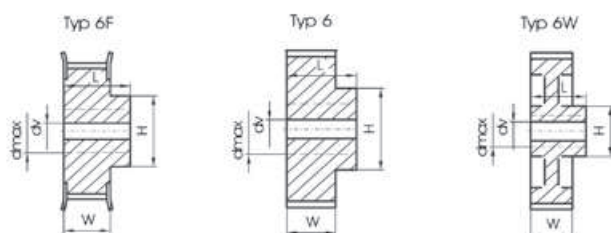

Počet zubů -označení	Hlavový průměr ozubení	Vnější průměr čel	Tvar	H	W	L	Předvrtání dv	Max. konečný otvor d	Hmotnost kg
-------------------------	------------------------------	-------------------------	------	---	---	---	------------------	----------------------------	----------------

HTD 5M-25 pro řemeny šířky 25 mm

Materiál: do P40-5M ocel, od P44-5M hliník

12-5M-25	17,96	23,0	6F	13,0	30	36	4	8,0	0,050
14-5M-25	21,14	25,0	6F	14,0	30	36	6	9,0	0,070
15-5M-25	22,73	28,0	6F	16,0	30	36	6	10,0	0,080
16-5M-25	24,32	28,0	6F	16,5	30	36	6	10,5	0,100
18-5M-25	27,51	32,0	6F	20,0	30	36	6	12,5	0,120
20-5M-25	30,69	36,0	6F	23,0	30	36	6	13,5	0,160
21-5M-25	32,28	38,0	6F	24,0	30	38	6	14,0	0,190
22-5M-25	33,87	38,0	6F	25,5	30	38	6	15,0	0,210
24-5M-25	37,06	42,0	6F	27,0	30	38	6	16,0	0,250
26-5M-25	40,24	44,0	6F	30,0	30	38	6	18,0	0,300
28-5M-25	43,42	48,0	6F	30,5	30	38	6	18,0	0,350
30-5M-25	46,60	51,0	6F	35,0	30	38	6	21,0	0,420
32-5M-25	49,79	54,0	6F	38,0	30	38	8	23,0	0,480
36-5M-25	56,16	60,0	6F	38,0	30	38	8	23,0	0,590
40-5M-25	62,52	71,0	6F	38,0	30	38	8	23,0	0,740
44-5M-25	68,89	-	6	38,0	30	40	8	23,0	0,320
48-5M-25	75,25	-	6W	38,0	30	40	8	23,0	0,275
60-5M-25	94,35	-	6W	50,0	30	40	8	30,0	0,435
72-5M-25	113,45	-	6W	50,0	30	40	8	30,0	0,525